attika
FEUERKULTUR

# Technical data sheet
# NEXO 120 GAS

OPTIONS

| | |
|---|---|
| **Firebox door** | |
| Steel door | ✓ |
| Glass door | ✓ |
| **Side window** | |
| Without side window | ✓ |
| Two side windows | ✓ |
| One side window (left/right) | ✓ |
| **Coating** | |
| Black | ✓ |
| Platinum | ✓ |
| Mocha | ✓ |
| Nickel | ✓ |
| Sand | ✓ |
| **Top plates** | |
| Steel 8 mm | ✓ |
| Stainless steel | ✓ |
| Soapstone | ✓ |
| **Side bench** | |
| Side bench narrow | ✓ |
| Side bench wide | ✓ |
| **Operating** | |
| Remote control | Standard |
| attika gas app | Option |
| Home Automation | Option |





ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

# Technical data sheet
# NEXO 120 GAS

PRODUCT INFORMATION

| Connections | |
|---|---|
| Flue pipe Ø (LAS) | 100/150 mm |
| Gas connection | Ø 12 mm \| 1/2" \| 3/8" |
| **Flue pipe outlet** | |
| Top | ✓ |
| Rear | ✓ |
| **Weight depending on model/equipment** | |
| Weight depending on model/equipment | 125 - 190 kg |
| **Permissible chimney systems** | |
| Schiedel Ontop Metaloterm | ✓ |
| Jeremias | ✓ |
| M&G Group | ✓ |
| Poujoulat | ✓ |
| **Certifications** | |
| Energy efficiency class | A |
| CE | EU 2016/426 |
| SVGW | 18-035-3 |

PRODUCT INFORMATION

| Certifications | |
|---|---|
| SVGW | ✓ |



ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

# Technical data sheet
# NEXO 120 GAS

SERVICES

| Output range | |
|---|---|
| Natural gas | G20/20 mbar | 1.2-6.4 kW |
| Propane gas | G31/50 mbar | 1.3-5.8 kW |
| **Gas consumption** | |
| Natural gas | G20/20 mbar | 0.84 $m^3$/h |
| Propane gas | G31/50 mbar | 0.29 $m^3$/h |
| **Maximum load** | |
| Natural gas | G20/20 mbar | 9.1 kW |
| Propane gas | G31/50 mbar | 8 kW |
| **Energy efficiency** | |
| Efficiency class Natural gas | G20/20 mbar | 2 |
| Efficiency class Propane gas | G31/50 mbar | 2 |

INSTALLATION

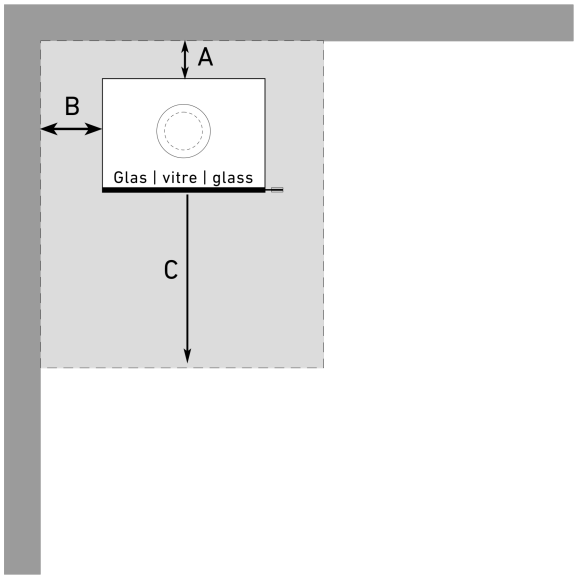
| Distances to combustible materials (without side window) | |
|---|---|
| A: to the back | 50 mm |
| B: to the side wall | 250 mm |
| C: to the front | 700 mm |
| D: upwards | 1000 mm |
| **Distances to combustible materials (with side window)** | |
| A: to the back | 50 mm |
| B: to the side wall | 300 mm |
| C: to the front | 700 mm |
| D: upwards | 1000 mm |

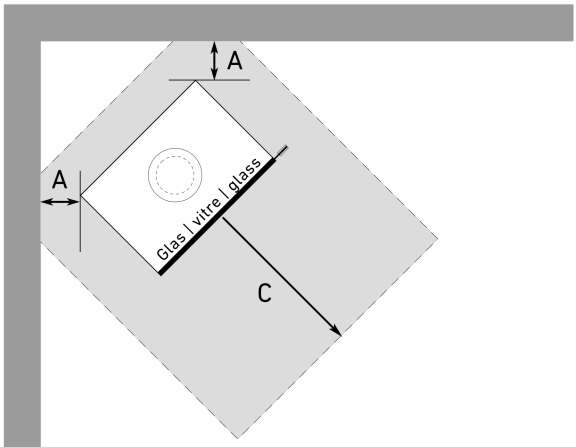


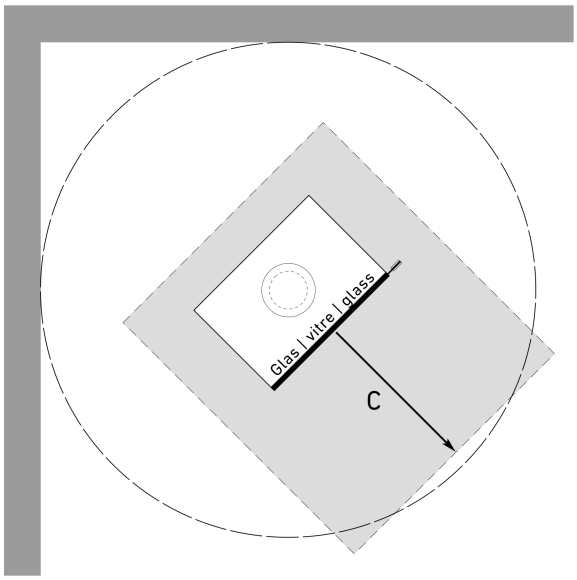
ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

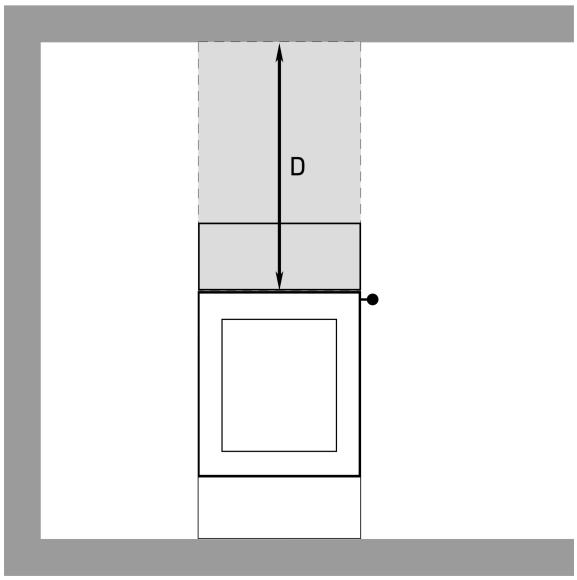
# Technical data sheet
# NEXO 120 GAS

Sketches of safety distances






ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch